

NGB-106-A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: M. Sato et al.
Serial No.: Unknown
Filed: Concurrently Herewith
Group Art Unit: Unknown
Examiner: Unknown
Title: "AIR BAG SYSTEM"

PRELIMINARY AMENDMENT-A

Box Patent Applications
U.S. Patent & Trademark Office
P.O. Box 2327
Arlington, VA 22202

Sir:

In connection with the subject new application (filed concurrently herewith), please amend the application as follows.

IN THE SPECIFICATION:

Please amend the specification as shown on the attached sheets (including a clean copy of the revised application and a copy of the original application showing the changes in hand-drawn markings).

IN THE CLAIMS:

Please amend claims 1-5 as shown on the attached sheets (including a clean version of the amended claims and a copy of the original claims showing the changes). Also, please add new claims 6 - 15 as shown on the attached sheets.

IN THE ABSTRACT:

Please amend the Abstract as shown on the attached sheets (including a clean version of the amended Abstract, and a copy of the Abstract showing the changes).

REMARKS

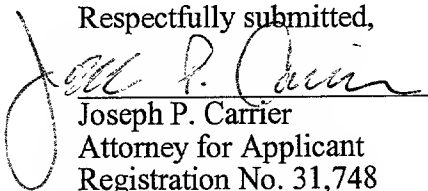
Upon entry of the present Preliminary Amendment-A the claims in the application are claims 1-15, of which claims 1 and 3 are independent.

The specification claims and abstract have been amended to overcome minor informalities therein, and to add new claims 6-15. Applicant respectfully submits that all of the above amendments are fully supported by the original application.

Favorable consideration is respectfully requested.

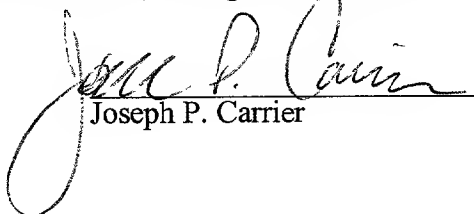
Customer No. 21828
Carrier, Blackman & Associates, P.C.
24101 Novi Road, Suite 100
Novi, Michigan 48375
November 30, 2001

Respectfully submitted,


Joseph P. Carrier
Attorney for Applicant
Registration No. 31,748
(248) 344-4422

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the U.S. Postal Service as Express Mail Certificate No. EL699973669US in an envelope addressed to Box Patent Applications, U.S. Patent and Trademark Office, P.O. Box 2327, Arlington, VA 22202 on November 30, 2001.


Joseph P. Carrier

AIR BAG SYSTEM

BACKGROUND OF THE INVENTION

The present invention relates to an air bag system
5 housed in an instrument panel in front of a front occupant
seat of a vehicle. More particularly, the present
invention relates to an air bag system dealing with air
bags of which various sizes are required for different
car types corresponding to a constant output of an
10 inflator.

DESCRIPTION OF THE RELATED ART

The air bag system is housed in a housing portion
in a front instrument panel. The air bag is housed in
15 a folding state in a retainer of the air bag system.
High-pressure gas generated from an inflator is introduced
into the air bag at the time of a collision of a vehicle,
so that the air bag is inflated toward a front seat occupant
for restraining the forward movement of the occupant due
20 to inertia force.

In air bag systems, different sizes of air bags are
required to be housed corresponding to different car types
which individually require different restraining
performances. It is true in the current situation that
25 there is a big difference in sizes between car types.

Since an air bag is inflated with high-pressure gas generated from an inflator (a gas generating device), the sizes of the air bag are one of ^{the} factors to determine the output of the inflator. As the sizes of the air bag are expanded, the volume thereof is increased. The increasing volume leads to a requirement of an inflator having a higher output.

As a result, inflators having different outputs need to be prepared for air bags of different sizes and volumes, and therefore the compatibility of air bag systems of the related art among car types remains low.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an air bag system [deals with] ^{which can properly use} various sizes of air bags corresponding to a constant output of ^{a given size inflator} an inflator, which are required for different car types.

In view of the aforesaid problem, after earnest studies the inventor ^S [and et al] have come to a conclusion that the problem may be solved by an air bag system including an air bag in a folded state housed in an instrumental panel, the air bag inflated ^S by an inflator when a vehicle is crashed, ^{wherein} the air bag comprising: ^{yes}

an opening portion into which a gas generated by

the inflator ^{flows} [is flowⁿ];

a gas flow path portion; and
an occupant restraint portion, ^{wherein} the gas ^{flows} [is flowⁿ] from the
opening portion to the occupant restraint portion;

5 [Namely, ^{further} the air bag system according to the present
invention is characterized by providing at least one of
the] penetrating portions] in the air bag.

through the
gas flow
path
portion.

In addition, the air bag system according to the
invention is characterized by provision of at least one
10 [of the] joint portions] in the air bag.

Furthermore, it is possible to provide both the
penetrating portion(s) and the joint portion(s). ^{in the air bag}

It is preferable to provide the penetrating portion
and/or the joint portion in the gas flow ^{path} portion of the
15 air bag to divide the gas flow ^{paths} portion into [at least one] ^{multiple}
[of the] gas flow ^{paths} portions]. This allows only the volume
of the gas flow path portion to be adjusted, while keeping
restraining performance of the air bag.

The penetrating portion and/or the joint portion
20 may be provided between the opening portion and the gas
flow path portion of the air bag, whereby the gas flow
path portion may be divided into [at least one of] ^{multiple} gas flow
path ^{s/} portions].

25

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross-sectional view of an instrument panel portion where an air bag according to the invention is housed;

Fig. 2 is a perspective view showing an air bag according to one embodiment of the present invention;

Fig. 3 is a cross-sectional view of the air bag taken along the line A-A thereof in Fig. 2;

Fig. 4 is a perspective view showing an air bag according to another embodiment of the present invention;

Fig. 5 is a cross-sectional view of the air bag taken along the line B-B in Fig. 4;

Fig. 6 is a perspective view showing a production process of the air bag shown in Fig. 4;

Fig. 7 is a perspective view showing an air bag according to a further embodiment of the present invention;

Fig. 8 is a cross-sectional view of the air bag taken along the line C-C thereof in Fig. 7;

Fig. 9 is a perspective view showing an air bag according to an embodiment of the present invention.

Fig. 10 is a cross-sectional view of the air bag taken along the line D-D thereof in Fig. 9;

Fig. 11 is a perspective view showing an air bag according to another embodiment of the present invention;

Fig. 12 is a cross-sectional view of the air bag

taken along the line E-E thereof in Fig. 11;

Fig. 13 is a perspective view showing an air bag according to a further embodiment of the present invention;

5 Fig. 14 is a perspective view showing an air bag according to a further embodiment of the present invention;

Fig. 15 is a cross-sectional view of the air bag taken along the line F-F thereof in Fig. 14; *views similar to Fig. 15*
(a) and 16(b) are showing a modification
10 Fig. 16 *(a) and 16(b) are* ~~is a~~ cross-sectional ~~[view]~~ of the air bag
~~taken along the line F-F thereof in another form~~ in Fig. 14; *in which Fig. 16(a) shows the air bag in a folded up state and Fig. 16(b) shows the air bag in an inflated state.*
Fig. 17 is a perspective view showing an air bag

according to another embodiment of the present invention;

15 Fig. 18 a cross-sectional view of the air bag taken along the line G-G thereof in Fig. 17;

Fig. 19 is a perspective view showing an air bag according to a further embodiment of the present invention;

20 Fig. 20 is a cross-sectional view of the air bag taken along the line H-H thereof in Fig. 19;

Fig. 21 is a perspective view of the air bag according to a further embodiment of the present invention;

Fig. 22 is a cross-sectional view of the air bag
25 taken along the line I-I thereof in Fig. 21; and

Fig. 23 is a cross-sectional view of the air bag taken along the line $\overline{J-J}$ thereof in Fig. 21.

DETAILED

DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 Fig. 1 is a cross-sectional view showing the deployed state of an air bag of one embodiment of an air bag system according to the present invention.

As shown in Fig. 1, the air bag system 1 is preferably housed at an upper portion in an instrument panel 11.

10 The air bag system 1 comprises:

an airtight container-like retainer 12 which opens to an upper surface of the instrument panel 11; and

lids 13a and 13b which close an upper end opening of the retainer 12.

15 An inflator 14 and an air bag 15 are accommodated in the interior of the retainer 12. The interior of the retainer has an air bag housing portion. ^{the} [An] inflator 14 is a container including a gas generating agent such as pyrotechnic material. When a collision is detected

20 through deceleration of a vehicle, the gas generating agent is ignited and high-pressure gas is then gushed or rapidly expelled out. The air bag 15 is something like a bag which opens

at the portion thereof at one end thereof. The air bag 15 is joined airtight to the retainer in such a manner that a gas generated from the inflator

25 14 flows in the air bag 15.

When the speed of the vehicle is drastically reduced due to a collision or the like, an acceleration sensor detects the deceleration of the vehicle to ignite the gas generating agent in the inflator 14. Then, high-pressure gas is gushed out and the air bag 15 is pressed against lower surfaces of the lids 13a and 13b. As a result, the lids 13a and 13b are then pushed up to rotate upwardly to thereby open the upper end opening of the retainer 12. Therefore, the air bag 15 is inflated through the opening.

The air bag 15 comprises the opening, a gas flow path portion 16 and an occupant restraint portion 17. The gas flow path portion 16 is a portion which substantially covers an upper surface of the instrument panel when the air bag is inflated.

The gas flowing out of the inflator 14 passes through the gas flow path portion 16 of the air bag via a gas flow-in portion in the retainer 12 and flows into the occupant restraint portion 17.

The air bag 15 is made of an airtight and soft material such as a nylon woven fabric and is preferably formed into a bag-like configuration using polyamide threads. In addition, it is preferable to have rubber or silicone having heat resistance coated on an internal surface of the air bag 15.

According to the air bag system of the present invention, the volume of air bags may be maintained constant by providing ^{1a}the penetrating portion or portions and/or ^{1b}the joint portion or portions in predetermined sizes in the air bag. Due to this, ^{1c}the inflator may be ^{1d}used on different car types while maintaining the occupant restraining performance of the air bag.

It is preferable to provide the penetrating portion or portions and/or the joint portion or portions in the 10 above gas flow path portion, whereby only the volume of the gas flow portion is [allowed to be] adjusted and the maintenance of the occupant restraining performance can be eased.

An example will be described in which the gas flow 15 path portion is penetrating partially into at least one of the flow paths by providing the penetrating portion in the gas flow path portion.

Fig. 2 is a perspective view showing a completely inflating state of an air bag having a penetrating portion. 20 Fig. 3 is a cross-sectional view of the air bag taken along the line A-A in Fig. 2.

The penetrating portion 21 may be formed, whereby a panel 22 joints an opening hole in an upper panel of the gas flow path portion with a hole in an lower panel 25 thereof. The panel 22 is a separate component along ports

Extending.

of the holes for the penetrating portion. The joining of the panel 22 can be implemented using a suturing method, a thermal fusing method or a bonding method using an adhesive (reference numerals 23 and 24 denoting sutured portions).

The gas generated from the inflator passes through an opening 25, then ^{if flows} [is penetrating] into flow paths 26a and 26b which are situated on sides of the penetrating portion 21 in the gas flow path portion, and finally flows into the occupant restraint portion.

Furthermore, preferably vent holes [(vent holes)] are provided in an air bag for exhausting the gas.

In the air bag 2, as shown in Fig. 2, vent holes 27a and 27b are provided in both side panels thereof.

Fig. 4 is a perspective view showing a completely deployed state of an air bag ³ with a penetrating portion according to another example, and Fig. 5 is a cross-sectional view of the air bag 3 taken along the line B-B in Fig. 4. In addition, Fig. 6 is a perspective view showing one [of] processes [es] for producing the air bag 3. A penetrating portion 31 can be formed by joining parts of upper and lower panels of a gas flow path portion in an oval fashion through suturing and then cutting out a joint portion 33 inside a sutured portion 32. Preferably polyamide threads are used for suturing. The gas

generated from the inflator ^{flows} is penetrating into flow paths 34a and 34b, which are situated on both sides of the penetrating portion in the gas flow path portion, and finally the gas flows into a occupant restraint portion ^{of the air bag}.

5 While there is no limitation to the configuration of the penetrating portion, a circular, oval, square or diamond shape may be preferred since the shapes can facilitate the formation of the penetrating portion.

In addition, the penetrating portion may be provided
10 in an end portion of the ^{gas flow path} penetrating portion attached to the opening of the air bag. Fig. 7 is a perspective view showing a completely inflating state of an air bag according to an example ^{of the invention} in which a penetrating portion is provided at an end portion of the ^{gas flow path} penetrating portion
15 attached to the opening of the air bag. Fig. 8 is a cross-sectional view of the air bag 4 taken along the line c-c thereof in Fig. 7. In this case, the openings 45a and 45b of the air bag 4 are formed as a penetrating configuration. The gas passes through the openings 45a and 45b and flows into an occupant restraint portion via
20 flow path portions 46a and 46b.

Fig. 9 is a perspective view showing the completely inflating state of an air bag according to another example ^{of the invention} in which a penetrating portion is provided at the end
25 portion of the opening portion. Fig. 10 is a

cross-sectional view of the air bag shown in Fig. 9 taken along the line D-D thereof. In this case, the openings 53a and 53b of the air bag are formed into a penetrating configuration. The gas passes through the openings 53a and 53b and flows into an occupant restraint portion via the flow paths 54a and 54b.

A plurality of penetrating portions may be provided in the gas flow ^{path} portion using a method similar to those described heretofore. Fig. 11 is a perspective view showing a completely inflating state of an air bag of an example in which a plurality of penetrating portions are provided in a gas flow path portion. Fig. 12 is a cross-sectional view of the air bag 6 shown in Fig. 11 taken along the line E-E. The gas [is penetrating in] a gas flow path portion into flow paths situated on sides of a penetrating portion 61a. The flow path portion is further penetrating ^{ed} at penetrating portions 61b and 61c into flow paths 63a, 63b and 63c and finally flows into the occupant restraint portion. *flows from*

Additionally, while the penetrating portion preferably pierces the gas flow path portion vertically, the penetrating portion may pierce the gas flow path portion transversely or a combination those vertical and transverse penetrating portions may be adopted.

Fig. 13 is a perspective view showing a completely

inflating state of an air bag according to a further example ^{of the invention} in which penetrating portions are provided in such a manner as to pierce a gas flow path portion vertically and transversely. The penetrating portions of the air bag 5 7 can be formed by providing notches for vertical penetrating portions in upper and lower panels of the gas flow path portion from openings and suturing a panel 71 which is a separate component (and is provided with notches for transverse penetrating portions) along the 10 notches as shown in Fig. 13 (reference numerals 72, 73, 74 and 75 denoting sutured portions). The opening of the air bag 7 ^{penetrates} [is penetrating] into four openings.

However, in case the penetrating portions are provided in such a manner as to start from openings of 15 an air bag, the number and configuration of gas flow-in portions within a retainer should be made to coincide with those of the openings of the air bag.

Fig. 14 is a perspective view showing a completely deployed state of an air bag according to an example ^{of the invention} in 20 which joint portions are provided, and Fig. 15 is a cross-sectional view of the air bag 8 shown in Fig. 14 taken long the line F-F thereof. Joint portions 81 and 82 are formed by linearly joining part ⁵ of upper and lower panels together at two locations in an air bag deployment 25 direction. A suturing method, a thermal fusing method

or a bonding method using an adhesive may be used as a method for joining the upper panel to the lower panel (reference numerals 81 and 82 denoting sutured or joint portions).

5 [Fig. 16 shows] Fig. 16(a) and 16(b) are cross-sectional views showing the cross section taken along the line F-F of the air bag shown in Fig. 14 in another or modified form, in which Fig. 16A ^(a) shows a cross-sectional view prior to deployment in a state in which the air bag is folded up, whereas Fig. 16B ^(b) shows 10 a completely deployed state of the air bag. As shown in Fig. 16A ^(a), the joint portions 81 and 82 are provided in such a manner that there is little sag at a lower surface of a portion constituting a central flow path 84b, and therefore, when deployed the flow path 84b becomes thinner 15 than flow paths 84a and 84c.

The gas generated from the inflator [is penetrating] flows into the three flow paths 84a, 84b and 84c before it flows into a occupant restraint portion.

Fig 17 is a perspective view showing a completely 20 deployed state of an air bag according to another example of the invention in which a joint portion is provided, and Fig. 18 is a cross-sectional view of the air bag 9 shown in Fig. 17 taken along the line G-G thereof. A joint portion 91 can be formed by joining parts of upper and lower panels in 25 a gas flow path portion together in an oval fashion, whereby

two flow paths 93a and 93b can be formed in the gas flow path portion.

Fig. 19 is a perspective view showing a completely deployed state of an air bag according to a further example *of the invention* in which a joint portion is provided in such a manner as to start from an opening, *portion* and Fig. 20 is a cross-sectional view of the air bag 10 shown in Fig. 19 taken along the line H-H thereof. A joint portion 101 can be formed by joining parts of upper and lower panels of a gas flow path portion in such a manner as to form a belt-like configuration extending from the opening *portion* and having a rounded end, whereby two flow paths 104a and 104b can be formed in the gas flow path portion. In this case, the opening of the air bag is formed into a penetrating configuration which is penetrating into openings 103a and 103b. The gas passes through the openings 103a and 103b and flows into an occupant restraint portion via the flow paths 104a and 104b. In this case, too, however, the number and configuration of gas flow-in portions within a retainer should be made to coincide with those of the openings of the air bag.

Fig. 21 is a perspective view showing a completely deployed state of an air bag according to another example *of the invention* in which joint portions are provided, Fig. 22 is a cross-sectional view of the air bag 11 shown in Fig. 21

taken along the line I-I thereof, and Fig. 23 is a cross-sectional view of the air bag 11 shown in Fig. 21 taken along the line J-J thereof. Joint portions 111, 112 and 113 are formed by joining parts of upper and lower panels together at three locations in an air bag deployment direction in a linear fashion. A lower surface of a portion constituting a central flow path 116b is first cut partially away and then is sutured (reference numeral 114 denoting the sutured portion), and therefore the central flow path 116b becomes thinner than flow paths 116a and 116c. The gas passes through the openings 115a, 115b and 115c and then flows into a occupant restraint portion via the three flow paths 116a, 116b and 116c in the gas flow path portion.

While there is no limitation to the configurations of the joint portions, a circular, oval, square, diamond or linear configuration is preferred since they facilitate the formation of the joint portions.

Both the aforesaid penetrating portions and joint portions may be provided in an air bag.

The penetrating portions and/or joint portions are preferably provided in such a manner that the capacity of air bags becomes constant in varying the sizes of air bags as required for different car types, whereby an inflator having a constant output can be used commonly

for different car types.

In addition, in a case where an inflator with a constant output is used, the penetrating portions and/or joint portions are preferably provided in such a size
5 that 0.1 to 0.2 second is required from sensing of a collision of the vehicle by the sensor to deflation of the air bag after it is inflated in a front barrier collision test with a test vehicle running speed of 50 to 55km/h.

10 Preferably a total of cross-sectional areas of penetrating flow paths is 160cm^2 or greater when portions in a gas flow path portion where the penetrating portions and/or joint portions exist are cut in a plane normal to an air bag deployment direction, and more preferably
15 the total becomes 240cm^2 or greater. With the total being less than 90cm^2 , not only is the air bag deployed at slower speed but also an internal pressure applied to the gas flow path portion by the gas becomes so high that there is causes^d a risk of the air bag being exploded.

20 Thus, while the air bag system according to the invention has been described heretofore with reference to the appended drawings, the invention is not limited thereto but many modifications can be made thereto without departing from the spirit and scope of the invention.

25 According to the air bag system of the invention,

the capacity of different air bags which are required for different car types can be maintained constant by providing penetrating portions and/or joint portions which are both dimensioned into predetermined sizes.

5 Therefore, the ^{same size} inflator can be used commonly on different car types while maintaining the occupant restraining performance of the air bags, whereby the production cost of air bag systems can be reduced. The air bag system of the invention is preferred for use for a front occupant
10 air bag system.

In addition, since the capacity of an air bag can be reduced when compared with a conventional air bag of the same size, an inflator of a smaller output can be adopted, thereby making it possible to make the inflator
15 smaller in size and lighter in weight.

WHAT IS CLAIMED IS:

1. An air bag in a folded state housed in an instrumental panel, the air bag inflated^s by an inflator when a vehicle is crashed, the air bag comprising:

5 an opening portion into which a gas generated by the inflator ^{flows} [is flown];

a gas flow path portion; and

an occupant restraint portion, ^{wherein} the gas ^{flows} [is flown] from the opening portion to the occupant restraint portion ^{through the gas flow path portion} ^{lands} [wherein] at least one [of] penetrating portions is ^{located within the air bag.}

2. The air bag according to claim 1, wherein the penetrating portions ^{said} [divides] a gas flow path portion into ^{two or more} ^{flow paths} for flowing the gas from the opening portion to the occupant restraint portion through the gas flow path ^{portion}.

3. An air bag in a folded state housed in an instrumental panel, the air bag inflated^s by an inflator when a vehicle is crashed, the air bag comprising:

an opening portion into which a gas generated by the inflator ^s [is flown];

a gas flow path portion; and

25 an occupant restraint portion, ^{wherein} the gas ^s [is flown] from

the opening portion to the occupant restraint portion,
(wherein) at least one [of] joint portion is located
within the air bag.

through the gas
flow path
portion
and

5 4. The air bag according to claim 3, wherein the
joint portion divides ^{the} gas flow path portion into two
or more ^{flow paths} for flowing the gas from the opening portion to
the occupant restraint portion through the gas flow path
portion.

10

5. The air bag according to claim 3, wherein the
joint portion is formed by partially sewing ^{parts of} the gas flow
path portion ^{together}.

15

Abstract

[A method for providing at least one or more penetrating portions and/or joint portions in an ^{An}air bag system which is housed in an instrument panel and in which
5 an inflator is ignited by a signal from an acceleration sensor at the time of frontal collision of a vehicle, whereby an air bag is deployed by gas generated so as to restrain a front seat occupant, the air bag having an opening through which the generated gas is allowed
10 to flow in ^{to} the air bag, [a gas flow path portion and] a ^{an} occupant restraint portion.

[^], a gas flow path portion between the opening and the occupant restraint portion, and at least one penetrating portion and/or joint portion located within the air bag for dividing the gas flow path portion into multiple flow paths.

AIR BAG SYSTEM

BACKGROUND OF THE INVENTION

The present invention relates to an air bag system housed
5 in an instrument panel in front of a front occupant seat of
a vehicle. More particularly, the present invention relates
to an air bag system dealing with air bags of which various
sizes are required for different car types corresponding to
a constant output of an inflator.

10

DESCRIPTION OF THE RELATED ART

The air bag system is housed in a housing portion in
a front instrument panel. The air bag is housed in a folding
state in a retainer of the air bag system. High-pressure gas
15 generated from an inflator is introduced into the air bag
at the time of a collision of a vehicle, so that the air bag
is inflated toward a front seat occupant for restraining the
forward movement of the occupant due to inertia force.

In air bag systems, different sizes of air bags are
20 required to be housed corresponding to different car types
which individually require different restraining
performances. It is true in the current situation that there
is a big difference in sizes between car types.

Since an air bag is inflated with high-pressure gas
25 generated from an inflator (a gas generating device), the

sizes of the air bag are one of the factors to determine the output of the inflator. As the sizes of the air bag are expanded, the volume thereof is increased. The increasing volume leads to a requirement of an inflator having a higher output.

5 As a result, inflators having different outputs need to be prepared for air bags of different sizes and volumes, and therefore the compatibility of air bag systems of the related art among car types remains low.

10

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an air bag system which can properly use various sizes of air bags corresponding to a constant output of a given size inflator, which are required for different car types.

15

In view of the aforesaid problem, after earnest studies the inventors have come to a conclusion that the problem may be solved by an air bag system including an air bag in a folded state housed in an instrumental panel, the air bag inflates by an inflator when a vehicle is crashed, wherein the air bag comprises:

20

an opening portion into which a gas generated by the inflator flows;

a gas flow path portion; and

25 an occupant restraint portion, wherein

the gas flows from the opening portion to the occupant restraint portion through the gas flow path portion.

Namely, the air bag system according to the present invention is characterized by providing at least one penetrating portion in the air bag.

In addition, the air bag system according to the invention is characterized by provision of at least one joint portion in the air bag.

Furthermore, it is possible to provide both the penetrating portion(s) and the joint portion(s) in the air bag.

It is preferable to provide the penetrating portion and/or the joint portion in the gas flow path portion of the air bag to divide the gas flow portion into multiple gas flow paths. This allows only the volume of the gas flow path portion to be adjusted, while keeping restraining performance of the air bag.

The penetrating portion and/or the joint portion may be provided between the opening portion and the gas flow path portion of the air bag, whereby the gas flow path portion may be divided into multiple gas flow paths.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross-sectional view of an instrument panel portion where an air bag according to the invention is housed;

Fig. 2 is a perspective view showing an air bag according to one embodiment of the present invention;

Fig. 3 is a cross-sectional view of the air bag taken
5 along the line A-A thereof in Fig. 2;

Fig. 4 is a perspective view showing an air bag according to another embodiment of the present invention;

Fig. 5 is a cross-sectional view of the air bag taken along the line B-B in Fig. 4;

10 Fig. 6 is a perspective view showing a production process of the air bag shown in Fig. 4;

Fig. 7 is a perspective view showing an air bag according to a further embodiment of the present invention;

15 Fig. 8 is a cross-sectional view of the air bag taken along the line C-C thereof in Fig. 7;

Fig. 9 is a perspective view showing an air bag according to an embodiment of the present invention.

Fig. 10 is a cross-sectional view of the air bag taken along the line D-D thereof in Fig. 9;

20 Fig. 11 is a perspective view showing an air bag according to another embodiment of the present invention;

Fig. 12 is a cross-sectional view of the air bag taken along the line E-E thereof in Fig. 11;

25 Fig. 13 is a perspective view showing an air bag according to a further embodiment of the present invention;

Fig. 14 is a perspective view showing an air bag according to a further embodiment of the present invention;

Fig. 15 is a cross-sectional view of the air bag taken along the line F-F thereof in Fig. 14;

5 Figs. 16(a) and 16(b) are cross-sectional views similar to Fig. 15 showing a modification of the air bag in Fig. 14, in which Fig. 16(a) shows the air bag in a folded up state and Fig. 16(b) shows the air bag in an inflated state;

Fig. 17 is a perspective view showing an air bag according to another embodiment of the present invention;

Fig. 18 is a cross-sectional view of the air bag taken along the line G-G thereof in Fig. 17;

Fig. 19 is a perspective view showing an air bag according to a further embodiment of the present invention;

15 Fig. 20 is a cross-sectional view of the air bag taken along the line H-H thereof in Fig. 19;

Fig. 21 is a perspective view of the air bag according to a further embodiment of the present invention;

Fig. 22 is a cross-sectional view of the air bag taken along the line I-I thereof in Fig. 21; and

Fig. 23 is a cross-sectional view of the air bag taken along the line J-J thereof in Fig. 21.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 Fig. 1 is a cross-sectional view showing the deployed

state of an air bag of one embodiment of an air bag system according to the present invention.

As shown in Fig. 1, the air bag system 1 is preferably housed at an upper portion in an instrument panel 11. The
5 air bag system 1 comprises:

an airtight container-like retainer 12 which opens to an upper surface of the instrument panel 11; and

lids 13a and 13b which close an upper end opening of the retainer 12.

10 An inflator 14 and an air bag 15 are accommodated in the interior of the retainer 12. The interior of the retainer has an air bag housing portion. The inflator 14 is a container including a gas generating agent such as pyrotechnic material. When a collision is detected through deceleration of a vehicle,
15 the gas generating agent is ignited and high-pressure gas is then gushed or rapidly expelled out. The air bag 15 is something like a bag which opens at one end thereof. The air bag 15 is joined airtight at the opening portion thereof to the retainer in such a manner that a gas generated from the
20 inflator 14 flows in the air bag 15.

When the speed of the vehicle is drastically reduced due to a collision or the like, an acceleration sensor detects the deceleration of the vehicle to ignite the gas generating agent in the inflator 14. Then, high-pressure gas is gushed
25 out and the air bag 15 is pressed against lower surfaces of

the lids 13a and 13b. As a result, the lids 13a and 13b are then pushed up to rotate upwardly to thereby open the upper end opening of the retainer 12. Therefore, the air bag 15 is inflated through the opening.

5 The air bag 15 comprises the opening portion, a gas flow path portion 16 and an occupant restraint portion 17. The gas flow path portion 16 is a portion which substantially covers an upper surface of the instrument panel when the air bag is inflated.

10 The gas flowing out of the inflator 14 passes through the gas flow path portion 16 of the air bag via a gas flow-in portion in the retainer 12 and flows into the occupant restraint portion 17.

15 The air bag 15 is made of an airtight and soft material such as a nylon woven fabric and is preferably formed into a bag-like configuration using polyamide threads. In addition, it is preferable to have rubber or silicone having heat resistance coated on an internal surface of the air bag 15.

20 According to the air bag system of the present invention, the volume of air bags may be maintained constant by providing a penetrating portion or portions and/or a joint portion or portions in predetermined sizes in the air bag. Due to this, the same size inflator may be used on different car types while maintaining the occupant restraining performance of
25 the air bag.

It is preferable to provide the penetrating portion or portions and/or the joint portion or portions in the above gas flow path portion, whereby only the volume of the gas flow portion is adjusted and the maintenance of the occupant
5 restraining performance can be eased.

An example will be described in which the gas flow path portion is penetrating partially into at least one of the flow paths by providing the penetrating portion in the gas flow path portion.

10 Fig. 2 is a perspective view showing a completely inflating state of an air bag having a penetrating portion. Fig. 3 is a cross-sectional view of the air bag taken along the line A-A in Fig. 2.

The penetrating portion 21 may be formed, whereby a
15 panel 22 joins an opening hole in an upper panel of the gas flow path portion with a hole in a lower panel thereof. The panel 22 is a separate component extending along ports of the holes for the penetrating portion. The joining of the panel 22 can be implemented using a suturing method, a thermal
20 fusing method or a bonding method using an adhesive (reference numerals 23 and 24 denoting sutured portions).

The gas generated from the inflator passes through an opening 25, then flows into flow paths 26a and 26b which are situated on sides of the penetrating portion 21 in the gas
25 flow path portion, and finally flows into the occupant restraint

portion.

Furthermore, preferably vent holes are provided in an air bag for exhausting the gas.

In the air bag 2, as shown in Fig. 2, vent holes 27a
5 and 27b are provided in both side panels thereof.

Fig. 4 is a perspective view showing a completely deployed state of an air bag 3 with a penetrating portion according to another example, and Fig. 5 is a cross-sectional view of the air bag 3 taken along the line B-B in Fig. 4. In addition,
10 Fig. 6 is a perspective view showing one process for producing the air bag 3. A penetrating portion 31 can be formed by joining parts of upper and lower panels of a gas flow path portion in an oval fashion through suturing and then cutting out a joint portion 33 inside a sutured portion 32. Preferably
15 polyamide threads are used for suturing. The gas generated from the inflator flows into flow paths 34a and 34b, which are situated on both sides of the penetrating portion in the gas flow path portion, and finally the gas flows into a occupant restraint portion of the air bag.

20 While there is no limitation to the configuration of the penetrating portion, a circular, oval, square or diamond shape may be preferred since the shapes can facilitate the formation of the penetrating portion.

In addition, the penetrating portion may be provided
25 in an end portion of the gas flow path portion attached to

the opening of the air bag. Fig. 7 is a perspective view showing a completely inflating state of an air bag according to an example of the invention in which a penetrating portion is provided at an end portion of the gas flow path portion
5 attached to the opening of the air bag. Fig. 8 is a cross-sectional view of the air bag 4 taken along the line c-c thereof in Fig. 7. In this case, the openings 45a and 45b of the air bag 4 are formed as a penetrating configuration. The gas passes through the openings 45a and 45b and flows into an
10 occupant restraint portion via flow path portions 46a and 46b.

Fig. 9 is a perspective view showing the completely inflating state of an air bag according to another example of the invention in which a penetrating portion is provided
15 at the end portion of the opening portion. Fig. 10 is a cross-sectional view of the air bag shown in Fig. 9 taken along the line D-D thereof. In this case, the openings 53a and 53b of the air bag are formed into a penetrating configuration. The gas passes through the openings 53a and 53b and flows
20 into an occupant restraint portion via the flow paths 54a and 54b.

A plurality of penetrating portions may be provided in the gas flow path portion using a method similar to those described heretofore. Fig. 11 is a perspective view showing
25 a completely inflating state of an air bag of an example in

which a plurality of penetrating portions are provided in a gas flow path portion. Fig. 12 is a cross-sectional view of the air bag 6 shown in Fig. 11 taken along the line E-E. The gas flows from a gas flow path portion into flow paths
5 situated on sides of a penetrating portion 61a. The flow path portion is further penetrated at penetrating portions 61b and 61c into flow paths 63a, 63b and 63c and finally flows into the occupant restraint portion.

Additionally, while the penetrating portion preferably
10 pierces the gas flow path portion vertically, the penetrating portion may pierce the gas flow path portion transversely or a combination those vertical and transverse penetrating portions may be adopted.

Fig. 13 is a perspective view showing a completely
15 inflating state of an air bag according to a further example of the invention in which penetrating portions are provided in such a manner as to pierce a gas flow path portion vertically and transversely. The penetrating portions of the air bag 7 can be formed by providing notches for vertical penetrating
20 portions in upper and lower panels of the gas flow path portion from openings and suturing a panel 71 which is a separate component (and is provided with notches for transverse penetrating portions) along the notches as shown in Fig. 13 (referencenumerals 72, 73, 74 and 75 denoting sutured portions).
25 The opening of the air bag 7 penetrates into four openings.

However, in case the penetrating portions are provided in such a manner as to start from openings of an air bag, the number and configuration of gas flow-in portions within a retainer should be made to coincide with those of the openings
5 of the air bag.

Fig. 14 is a perspective view showing a completely deployed state of an air bag according to an example of the invention in which joint portions are provided, and Fig. 15 is a cross-sectional view of the air bag 8 shown in Fig. 14
10 taken long the line F-F thereof. Joint portions 81 and 82 are formed by linearly joining parts of upper and lower panels together at two locations in an air bag deployment direction. A suturing method, a thermal fusing method or a bonding method using an adhesive may be used as a method for joining the
15 upper panel to the lower panel (reference numerals 81 and 82 denoting sutured or joint portions).

Figs. 16 (a) and 16 (b) are cross-sectional views showing the cross section taken along the line F-F of the air bag shown in Fig. 14 in another or modified form, in which Fig.
20 16 (a) shows a cross-sectional view prior to deployment in a state in which the air bag is folded up, whereas Fig. 16 (b) shows a completely deployed state of the air bag. As shown in Fig. 16 (a), the joint portions 81 and 82 are provided in such a manner that there is little sag at a lower surface
25 of a portion constituting a central flow path 84b, and therefore,

when deployed the flow path 84b becomes thinner than flow paths 84a and 84c.

The gas generated from the inflator flows into the three flow paths 84a, 84b and 84c before it flows into a occupant
5 restraint portion.

Fig 17 is a perspective view showing a completely deployed state of an air bag according to another example of the invention in which a joint portion is provided, and Fig. 18 is a cross-sectional view of the air bag 9 shown in
10 Fig. 17 taken along the line G-G thereof. A joint portion 91 can be formed by joining parts of upper and lower panels in a gas flow path portion together in an oval fashion, whereby two flow paths 93a and 93b can be formed in the gas flow path portion.

15 Fig. 19 is a perspective view showing a completely deployed state of an air bag according to a further example of the invention in which a joint portion is provided in such a manner as to start from an opening portion, and Fig. 20 is a cross-sectional view of the air bag 10 shown in Fig.
20 19 taken along the line H-H thereof. A joint portion 101 can be formed by joining parts of upper and lower panels of a gas flow path portion in such a manner as to form a belt-like configuration extending from the opening portion and having a rounded end, whereby two flow paths 104a and 104b can be
25 formed in the gas flow path portion. In this case, the opening

of the air bag is formed into a penetrating configuration which is penetrating into openings 103a and 103b. The gas passes through the openings 103a and 103b and flows into an occupant restraint portion via the flow paths 104a and 104b.

5 In this case, too, however, the number and configuration of gas flow-in portions within a retainer should be made to coincide with those of the openings of the air bag.

Fig. 21 is a perspective view showing a completely deployed state of an air bag according to another example of the invention in which joint portions are provided, Fig. 22 is a cross-sectional view of the air bag 11 shown in Fig. 21 taken along the line I-I thereof, and Fig. 23 is a cross-sectional view of the air bag 11 shown in Fig. 21 taken along the line J-J thereof. Joint portions 111, 112 and 113 are formed by joining parts of upper and lower panels together at three locations in an air bag deployment direction in a linear fashion. A lower surface of a portion constituting a central flow path 116b is first cut partially away and then is sutured (reference numeral 114 denoting the sutured portion), and therefore the central flow path 116b becomes thinner than flow paths 116a and 116c. The gas passes through the openings 115a, 115b and 115c and then flows into an occupant restraint portion via the three flow paths 116a, 116b and 116c in the gas flow path portion.

25 While there is no limitation to the configurations of

the joint portions, a circular, oval, square, diamond or linear configuration is preferred since they facilitate the formation of the joint portions.

Both the aforesaid penetrating portions and joint
5 portions may be provided in an air bag.

The penetrating portions and/or joint portions are preferably provided in such a manner that the capacity of air bags becomes constant in varying the sizes of air bags as required for different car types, whereby an inflator having
10 a constant output can be used commonly for different car types.

In addition, in a case where an inflator with a constant output is used, the penetrating portions and/or joint portions are preferably provided in such a size that 0.1 to 0.2 second is required from sensing of a collision of the vehicle by
15 the sensor to deflation of the air bag after it is inflated in a front barrier collision test with a test vehicle running speed of 50 to 55km/h.

Preferably a total of cross-sectional areas of penetrating flow paths is 160cm^2 or greater when portions
20 in a gas flow path portion where the penetrating portions and/or joint portions exist are cut in a plane normal to an air bag deployment direction, and more preferably the total becomes 240cm^2 or greater. With the total being less than 90cm^2 , not only is the air bag deployed at slower speed but
25 also an internal pressure applied to the gas flow path portion

by the gas becomes so high that there is caused a risk of the air bag being exploded.

Thus, while the air bag system according to the invention has been described heretofore with reference to the appended
5 drawings, the invention is not limited thereto but many modifications can be made thereto without departing from the spirit and scope of the invention.

According to the air bag system of the invention, the capacity of different air bags which are required for different
10 car types can be maintained constant by providing penetrating portions and/or joint portions which are both dimensioned into predetermined sizes. Therefore, the same size inflator can be used commonly on different car types while maintaining the occupant restraining performance of the air bags, whereby
15 the production cost of air bag systems can be reduced. The air bag system of the invention is preferred for use for a front occupant air bag system.

In addition, since the capacity of an air bag can be reduced when compared with a conventional air bag of the same
20 size, an inflator of a smaller output can be adopted, thereby making it possible to make the inflator smaller in size and lighter in weight.

WHAT IS CLAIMED IS:

1. An air bag in a folded state housed in an instrumental panel, the air bag inflates by an inflator when a vehicle is crashed, the air bag comprising:

5 an opening portion into which a gas generated by the inflator flows;

a gas flow path portion; and

an occupant restraint portion, wherein

10 the gas flows from the opening portion to the occupant restraint portion through the gas flow path portion, and at least one penetrating portion is located within the air bag.

2. The air bag according to claim 1, wherein the
15 penetrating portion divides said gas flow path portion into two or more flow paths for flowing the gas from the opening portion to the occupant restraint portion through the gas flow path portion.

20 3. An air bag in a folded state housed in an instrumental panel, the air bag inflates by an inflator when a vehicle is crashed, the air bag comprising:

an opening portion into which a gas generated by the inflator flows;

25 a gas flow path portion; and

an occupant restraint portion, wherein
the gas flows from the opening portion to the occupant
restraint portion through the gas flow path portion, and
at least one joint portion is located within the air
5 bag.

4. The air bag according to claim 3, wherein the
joint portion divides the gas flow path portion into two or
more for flowing the gas from the opening portion to the occupant
10 restraint portion through the gas flow path portion.

5. The air bag according to claim 3, wherein the joint
portion is formed by partially sewing parts of the gas flow
path portion together.
15

6. The air bag according to claim 1, including a
plurality of said penetrating portions.

7. The air bag according to claim 1, wherein said
20 penetrating portion reduces an opening area of said gas flow
path portion.

8. The air bag according to claim 6, wherein said
penetrating portions reduce an opening area of said gas flow
25 path portion.

9. The air bag according to claim 6, wherein the penetrating portions divide said gas flow path portion into multiple flow paths for flowing the gas from the opening
5 portion to the occupant restraint portion through the gas flow path portion.

10. The air bag according to claim 1, further including at least one joint portion located within the air bag.

11. The air bag according to claim 10, wherein said penetrating portion and said joint portion reduce an opening area of said gas flow path portion.

12. The air bag according to claim 3, including a plurality of said joint portions.

13. The air bag according to claim 3, wherein said joint portion reduces an opening area of said gas flow path
20 portion.

14. The air bag according to claim 12, wherein said joint portions reduce an opening area of said gas flow path portion.

25

15. The air bag according to claim 12, wherein the joint portions divide said gas flow path portion into multiple flow paths for flowing the gas from the opening portion to the occupant restraint portion through the gas flow path
5 portion.

10

Abstract

An air bag system which is housed in an instrument panel and in which an inflator is ignited by a signal from an acceleration sensor at the time of frontal collision of a vehicle, whereby an air bag is deployed by gas generated so as to restrain a front seat occupant, the air bag having an opening through which the generated gas is allowed to flow into the air bag, an occupant restraint portion, a gas flow path portion between the opening and the occupant restraint portion, and at least one penetrating portion or joint portion located within the air bag for dividing the gas flow path portion into multiple flow paths.